



# Element Triblend Racerback Ladies' Tank

## KOI8055L

### Product Features:


- 7.6-oz, 50/25/25 polyester/cotton/rayon
- Combed and RING SPUN cotton
- Ultra soft 32 single triblend jersey
- **OEKO TEX® STANDARD 100**



Ladies' sizes: XS-2XL



1x1 rib knit neck and arm holes

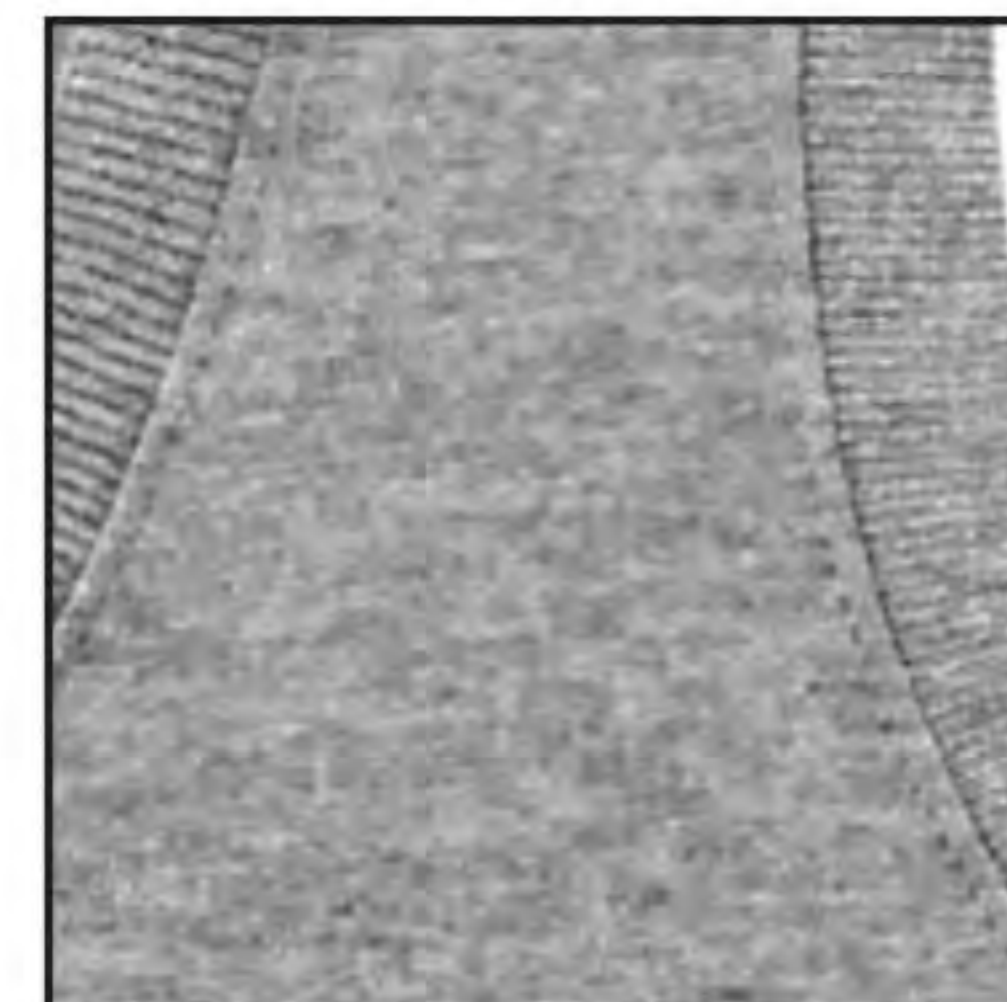

## Available Colours and PMS Colours

Textile fabric colours are subject to dye lot variation and will not be exact match to print pantone reference

ONYX



BLACK C

WHITE



NO PMS

GREY FROST



COOL GREY 11C



# KOI8055L - Element Triblend Racerback Ladies' Tank

## Garment Measurements

Size	XS	S	M	L	XL	2XL
Chest - Half Measure	15 1/4"	16 1/4"	17 1/4"	18 3/4"	20 1/4"	21 3/4"
Chest - Full Measure	30 1/2"	32 1/2"	34 1/2"	37 1/2"	40 1/2"	43 1/2"
Body Length from HPS	26"	26 1/2"	27"	27 1/2"	28"	28 1/2"

Finished measurements in inches. Refer to "How to Measure" guide for detailed information on measurement instructions.

## Ladies' General Sizing Guide

Size	XS	S	M	L	XL	2XL
Numeric Sizes	2	4-6	8-10	12-14	16	18-20
Bust	32"-34"	35"-36"	37"-38"	39"-41"	42"-44"	45"-47"
Waist	24"-25"	26"-27"	28"-30"	30"-32"	33"-35"	36"-38"
Hip	33"-35"	35"-37"	37"-39"	39"-41"	42"-44"	45"-47"

## Printing Instructions for Triblend Fabrics

Due to the nature of Triblend fabric (polyester + cotton + rayon blend), special care must be taken throughout the decoration process. Here are some tips to effectively decorate our Triblend products.

**Garment temperature must not exceed 320°F or 160°C.**

Exceeding this temperature will cause the fabric to shrink, become wavy or cause dye migration.

**Dryer temperature and belt speeds must be changed accordingly for Triblend fabric.**

Recommended belt time for Triblend is 70 seconds from the beginning to end of the dryer, or around a speed of 19.

- If flashing these garments, do not exceed 1-2 seconds. Anything longer may damage the fabric as stated above.

### SCREEN PRINTING

These garments require the use of poly inks that cure at a lower temperature. A Dyno Grey base blocker on all colours and a second white base blocker on all dark colours are recommended. Please consult your ink supplier for more information.

- Triblend fabrics may require a longer cooling time than 100% Cotton fabrics. Avoid overlap of garments and screenprint/heat transfer until the garments are cooled. Failure to cool the fabric prior to stacking into a printer's fold may cause the fabric and applied ink to stick together.

### HEAT TRANSFERS

Poly mark heat transfers may need to be created with an anti-migration layer in the design. Inks used in printing paper design needs to be darker than the base fabric or colour may migrate with the fabric colour resulting in a bleeding effect.

- If you heat press these garments, you must adjust the time, temperature and pressure.

Failure to do so may damage the fabric as stated above.

- A test sample run is recommended, especially if you have a large order or if your printer does not specialize in printing on Triblend fabrics.